


51QL6-DV

495-520 Watt

MONO-FACIAL MODULE
WITH DUAL GLASS

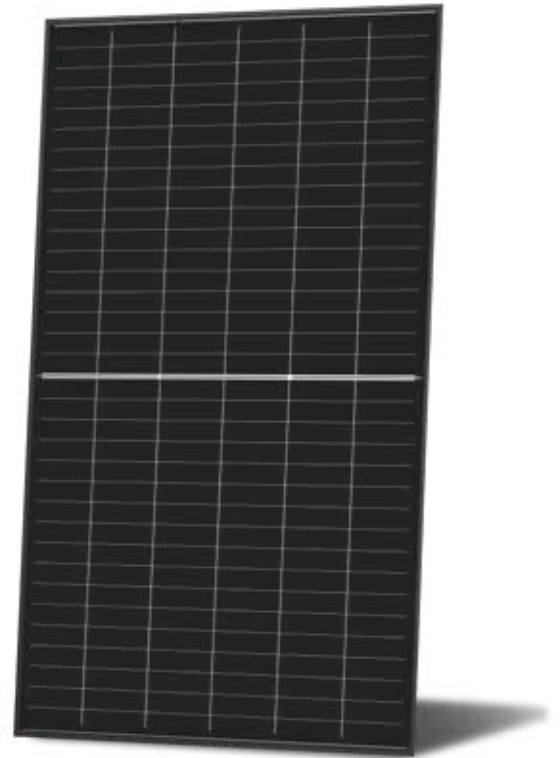

Higher Power on Front Side

Leading power class based on the enhanced N-type TOPCon platform, achieved through cutting-edge technology and an optimized layout that captures more sunlight.



Optimized Heat resistance

Optimized temperature coefficient achieved via advanced graphical patterning, busbar and multi-cell technology.




Proven Low Light Performance

Enhanced cell structure ensures superior module performance under low-light conditions.



Mechanical Load Enhanced

Certified to withstand:
5400 Pa front side max static test load
2400 Pa rear side max static test load

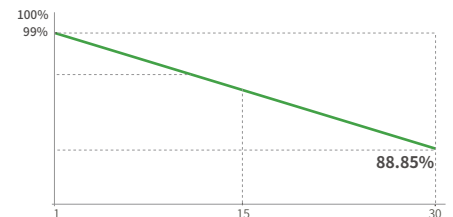

15 Year
Product Warranty

30 Year
Linear Power
Warranty

1%
First-year
Degradation

0.35%
Annual Degradation
Over 30 Years



Industry Leading Warranty

Advanced metallization and iterated module encapsulation deliver superior resistance to PID, LID / LeTID, and UV degradation.

- IEC61215:2021 / IEC61730:2023
- IEC61701 / IEC62716 / IEC60068 / IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



POSITIVE QUALITY™
Continuous Quality Assurance

JKM495-520N-51QL6-DV-F1-EN

51QL6-DV 495-520 Watt

Mechanical Characteristics

Cell Type	N- type Mono-crystalline
No. of cells	204 (51×4)
Dimensions	1906×1134×30 mm
Weight	23.0 kg
Front Glass	1.6 mm, Anti-reflection Coating
Back Glass	1.6 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	JK03M / JK03M2 / Others*
Output Cables (Including Connector)	4.0 mm ² (+): 600 mm , (-): 400 mm or Customized Length

* MC4-EVO2 available upon request and subject to availability

Packaging Configuration

Pallet Dimensions	1981×1140×1249 mm
Packing Detail (Two pallets = One stack)	37 pcs/pallets, 74 pcs/stack, 888 pcs/ 40'HQ Container

Specifications (STC)


Maximum Power - Pmax [Wp]	495	500	505	510	515	520
Maximum Power Voltage - Vmp [V]	32.74	32.90	33.05	33.21	33.36	33.51
Maximum Power Current - Imp [A]	15.12	15.20	15.28	15.36	15.44	15.52
Open-circuit Voltage - Voc [V]	38.18	38.44	38.69	38.94	39.19	39.44
Short-circuit Current - Isc [A]	15.75	15.80	15.85	15.90	15.95	15.99
Module Efficiency STC [%]	22.90	23.13	23.36	23.60	23.83	24.06
Power Tolerance	0 ~ +3 %					
Temperature Coefficient of Pmax	-0.26 %/°C					
Temperature Coefficient of Voc	-0.24 %/°C					
Temperature Coefficient of Isc	0.046 %/°C					

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Application Conditions

Operating Temperature	-40 °C ~ +70 °C
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	30 A

Engineering Drawings

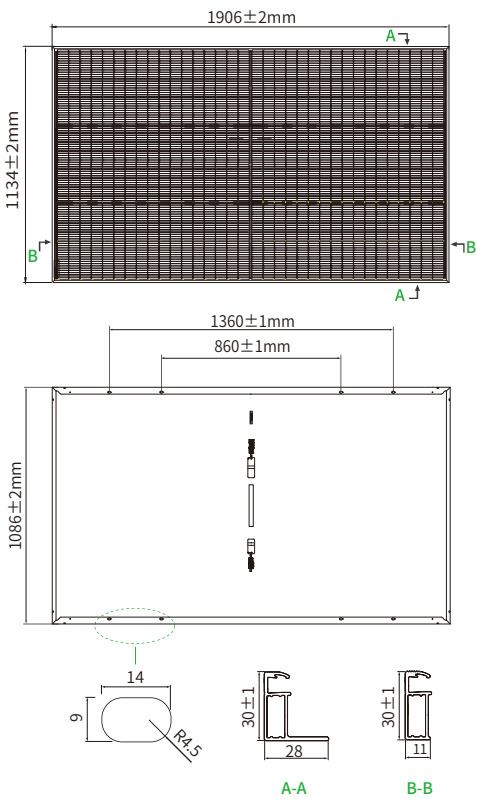

*Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

