


66QL6-BDX

645-670 Watt

85±5% Bifaciality

BIFACIAL MODULE

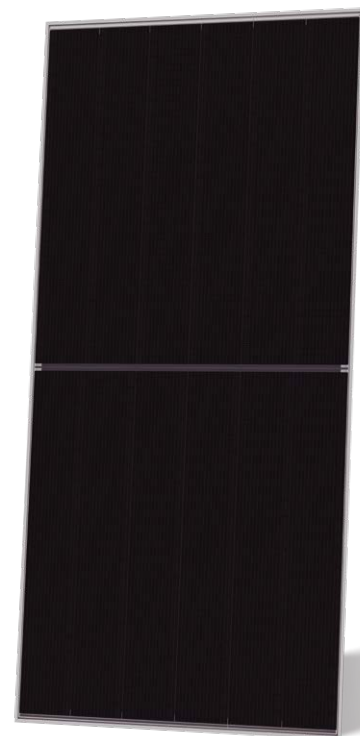

Higher Power on Front Side

Leading power class based on the enhanced N-type TOPCon platform, through cutting-edge technology and an optimized layout that captures more sunlight.



Better Generation on Rear Side

Enabling industry-leading bifaciality in TOPCon cells through an improved structure that enhances light absorption and trapping.



Fire Rating A

Obtained fire rating class A test report.



Proven Low Light Performance

Enhanced cell structure ensures superior module performance under low-light conditions.




High Hail Resistance

Tested to withstand hail strikes of up to 55mm.



Mechanical Load Enhanced

Certified to withstand:
7000 Pa front side max static test load
5000 Pa rear side max static test load

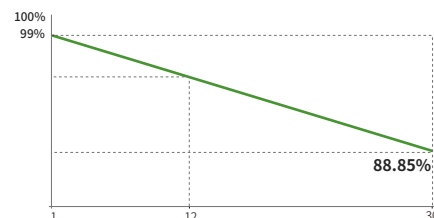

12 Year
Product Warranty

30 Year
Linear Power
Warranty

1%
First-year
Degradation

0.35%
Annual Degradation
Over 30 Years

- IEC61215:2021 / IEC61730:2023
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



POSITIVE QUALITY™
Continuous Quality Assurance

JKM645-670N-66QL6-BDX-F1-EN

66QL6-BDX 645-670 Watt

Mechanical Characteristics

Cell Type	N- type Mono-crystalline
No. of Cells	264 (66×4)
Dimensions	2382×1134×30 mm
Weight	38.8 kg
Front Glass	2.5 mm, Anti-reflection Coating
Back Glass	2.5 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class A
Connector Type	PV-JK03M/xy,PV-JK03M2/xy,PV-JC001/xy, PV-JC006/xyz (JinKO) ; PV-KST4-EVO2A/xy,PV-KBT4-EVO2A/xy (Staubli)
Output Cables (Including Connector)	≥4.0 mm ² (+): 500 mm , (-): 400 mm or Customized Length

Packing Configuration

Pallet Dimensions	2442×1140×1251 mm
Packing Detail (Two pallets = One stack)	36 pcs/pallet, 72 pcs/stack, 612 pcs/ 40'HQ Container

Specifications (STC)

Maximum Power - Pmax [Wp]	645	650	655	660	665	670
Maximum Power Voltage - Vmp [V]	42.27	42.57	42.70	42.78	42.85	42.92
Maximum Power Current - Imp [A]	15.26	15.27	15.34	15.43	15.52	15.61
Open-circuit Voltage - Voc [V]	49.88	50.26	50.44	50.50	50.55	50.60
Short-circuit Current - Isc [A]	15.98	15.98	16.04	16.14	16.24	16.34
Module Efficiency STC [%]	23.88	24.06	24.25	24.43	24.62	24.80
Bifacial Factor	85 ± 5%					
Power Measurement Tolerance	± 3%					
Power Sorting	0 ~ +3 %					
Temperature Coefficient of Pmax	-0.26 %/°C					
Temperature Coefficient of Voc	-0.24 %/°C					
Temperature Coefficient of Isc	0.046 %/°C					

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Specifications (BNPI)

Maximum Power - Pmax [Wp]*	718	724	729	735	741	746
Maximum Power Voltage - Vmp [V]	42.15	42.52	42.69	42.70	42.75	42.80
Maximum Power Current - Imp [A]	17.04	17.04	17.10	17.21	17.32	17.42
Open-circuit Voltage - Voc [V]	50.00	50.38	50.56	50.70	50.75	50.80
Short-circuit Current - Isc [A]	17.79	17.80	17.87	17.98	18.09	18.20

BNPI: Irradiance: Front 1000W/m², Rear 135W/m², Cell Temperature 25°C, AM=1.5.


*Power measurement tolerance: ±3%

Application Conditions

Level T _{g8} ≤ 70 °C	-40 °C ~ +70 °C *
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	35 A

*Short-term up to 85°C; higher operation requires IEC TS 63126 testing


Engineering Drawings

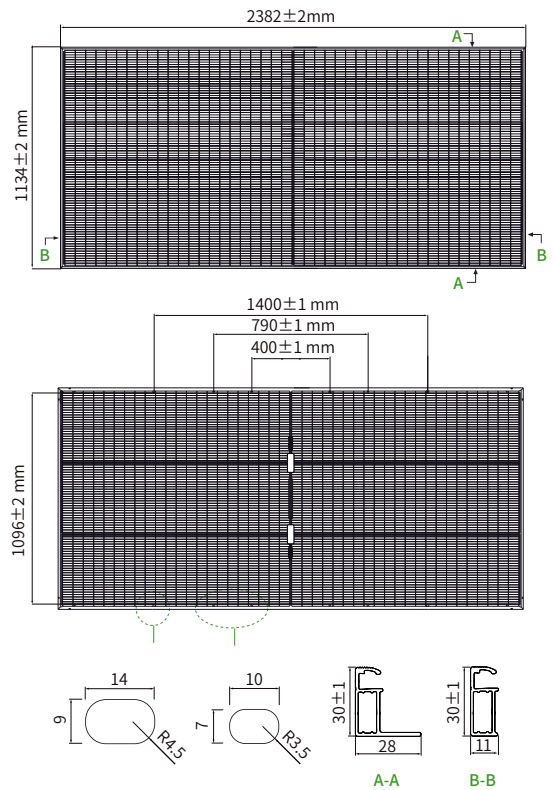

Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

Power-Voltage Curves (66QL6-BDX 660W)

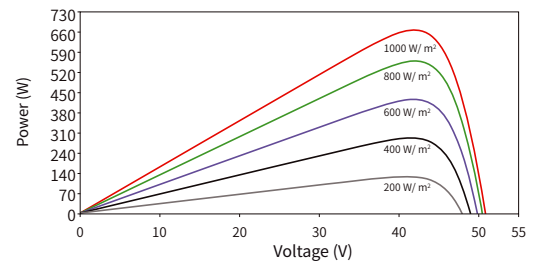

Current-Voltage Curves (66QL6-BDX 660W)

